

## The new FORTJES® Z-drive from REINTJES with contra rotating propellers for high speed applications

R. Schulze <sup>1</sup>, A. Weber <sup>2</sup>

<sup>1</sup> Potsdam Model Basin (SVA), Potsdam, Germany

<sup>2</sup> REINTJES GmbH, Hamelin, Germany

### ABSTRACT

For high speed planing vessels a propulsion concept improving efficiency, noise emission and comfort was developed. The resulting FORTJES® concept from REINTJES offers remarkable improvements with respect to these aspects.

Propellers are still the most used propulsion system for fast ships. Theoretical considerations and tests with different arrangements of contra rotating (CR) propellers at Z-drives for high speed applications lead to a CR- system with one propeller in front of and one propeller behind the gear box. These scientific findings as well as mechanical and geometric boundary conditions had to be combined brought together. Therefore all hydrodynamic active parts of this special CR-arrangement were optimized. A new asymmetric twisted strut offers the highest efficiency. An especially designed shape for the lower gear box gondola has been derived from bionic experiences and CFD calculations. Together with an exclusively designed pair of propellers these features constitute this new REINTJES concept for a high speed drive, called FORTJES®.

### KEY WORDS

CR propeller, Z-drive, push-pull arrangement, efficiency, cavitation, noise, high speed

### 1.0 INTRODUCTION

For high speed planing vessels a propulsion concept improving efficiency, noise emission and comfort was developed. The resulting FORTJES® concept from REINTJES offers remarkable improvements regarding these aspects. Propellers are still the most used propulsion system for fast ships. These propellers in general are combined with inclined shafts. The variation in the transversal velocity of the propeller in oblique inflow causes considerable changes in the profile angle of attack, which leads to cavitation especially if the propeller blades move downwards. To avoid such phenomena with inclined shafts, have to be applied L- or Z- drives with a lower gear box. Another aspect for avoiding difficulties with cavitation is the application of more than one propeller in a line. This originates from the idea to distribute the input power to more than one propeller, especially under restrictions in propeller diameter. The application of Z-drives with a lower gear box in combination with two propellers in line automatically leads to the idea of contra rotating propellers.

The contra rotating arrangement of propellers at the lower gear box is practicable in three ways: Both CR-propellers can be arranged in front of or behind the lower gear box. The third possible arrangement features one propeller in front and one propeller behind the lower gear box. The hydrodynamic advantages of a Z-drive for fast ships featuring CR-propellers are the improvement in efficiency and the reduction of cavitation and noise. A higher efficiency is gained by distribution the power on two propellers. The CR-arrangement eliminates the swirl and thus gains additional efficiency. Noise and cavitation are significantly reduced by realizing propeller shafts with no inclination. The paper evaluates the hydrodynamic properties of the different arrangements of CR-propellers at Z-drives for high speed applications. Theoretical considerations and tests with these different systems lead to a CR- system with one propeller in front and one propeller behind the gear box. These scientific findings as well as mechanical and geometric boundary conditions had to be combined brought together. Therefore all hydrodynamic active parts of this special CR-arrangement were optimised. A new asymmetric twisted strut offers the highest efficiency. An especially designed shape of the lower gear box gondola has been derived from bionic experiences and CFD calculations. Together with an exclusively designed pair of propellers these features constitute the new REINTJES concept for a high speed drive, called FORTJES®. For a yacht application the FORTJES®-drive was intensively tested in the model basin SVA-Potsdam. The propulsion, cavitation and manoeuvring properties were compared to a usual twin-screw arrangement.

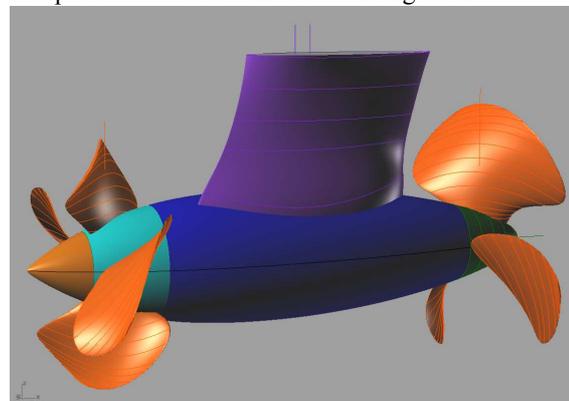


Fig. 1. FORTJES®-drive concept

## 2.0 TWIN PROPELLER PRE-DESIGN

For a high loaded propulsion system it is common practice to distribute the power (thrust) to more than one propeller (dependence of ideal efficiency of thrust loading coefficient). If the outer diameter of the propulsion system is restricted this becomes of special importance. Different propulsions systems compared in figure 2, showing the dependency of the thrust loading coefficient.

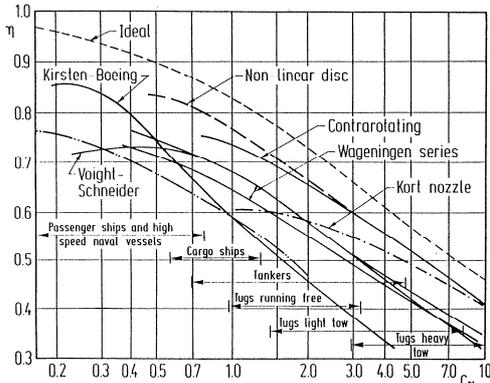


Fig. 2. Efficiency of different propulsor types (Breslin, Anderson)

For the distribution of the power or thrust on more than one propeller (or propulsion system) there are essentially the following possibilities:

1. More than one propellers on one shaft line (in most cases two propellers on one shaft line (twin propeller))
2. Single propellers on more than one shafts (e.g. usual twin screw ships)
3. Combinations of case 1 and 2

For case 1 both propellers on one shaft line can rotate in one direction or can be contra rotating. Furthermore, it is still possible to vary also the distance between the propellers.

The achievable efficiency depends not only on the thrust loading coefficient. Another losses represented in figure 3 have also be taken into account. The losses originated from the swirl in the propeller jet (figure 3, differences between curve (1) and (2)) can be reduced for twin propellers for one rotating direction by guide fins (e.g. Schottel twin propeller). In case of a contra rotating twin propeller arrangement (FORTJES®, REINTJES) the losses by swirl in the propeller jet can be eliminated, which is the main advantage of contra rotating propellers.

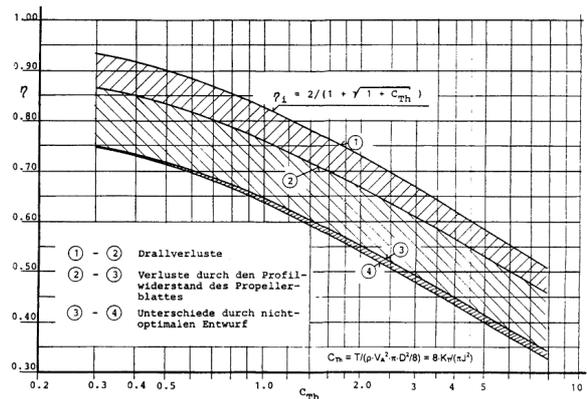


Fig. 3. Efficiencies and losses of a free running propeller in dependence of the thrust loading (van Manen)

There are the following possibilities to arrange contra rotating pairs of propellers at a lower gear box:

1. Both propellers in front of the gear box (pull-pull)
2. Both propellers behind the gear box (push-push)
3. One propeller in front of and one propeller behind (pull-push)

The pull-push arrangement has the essential mechanical advantage, that the hollow shaft is dispensable.

## 2.1 Estimation of optimal thrust distribution for two propellers

The following considerations based on the momentum theory and are valid for twin propellers on one shaft line (independent of direction of rotation). Because the first propeller accelerates the water, the second propeller has another thrust loading coefficient. From this follows, that in terms of ideal efficiency the best thrust distribution for both propeller is not 1:1. For a total thrust of  $T_1 + T_2$  and the first propeller diameter of  $D_1$  figure 4 shows the ideal efficiency in dependence of the distribution parameter  $\alpha$ . The maximum ideal efficiency is reached for  $\alpha = 0.47$ . For gondola applications the hub diameter is in general an important variable. The diagram in figure 4 considers this circumstance by taking two different hub diameters into account ( $D_H/D_1=0.406$  and  $D_H/D_1=0.435$  mm).

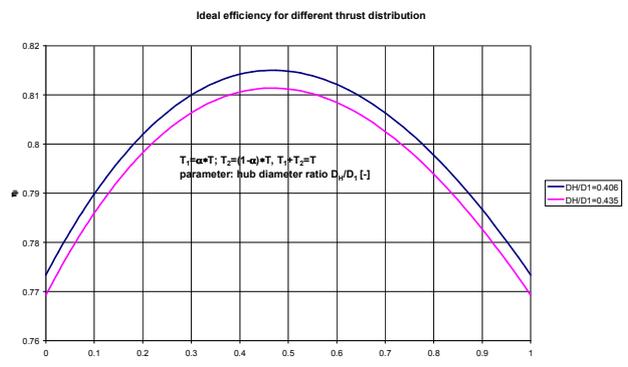


Fig. 4. Ideal efficiency in dependence of the thrust distribution between both propellers for two hub diameters

Due to the contraction of the jet caused by the acceleration of the first propeller, an optimal diameter of the second propeller can be derived. This is represented in figure 5 for different hub diameters in dependency of the distribution parameter  $\alpha$ .

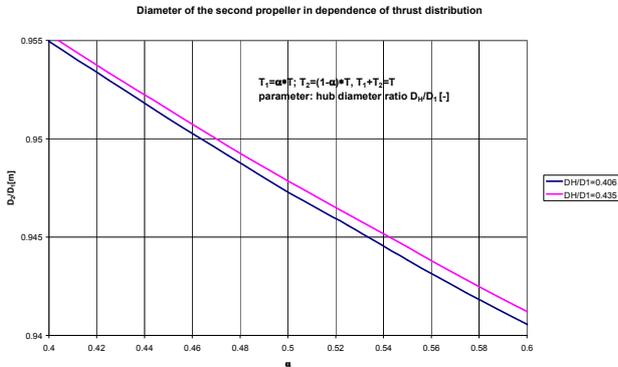


Fig. 5. Diameter of the second propeller in dependence of the thrust distribution and the hub diameter

## 2.2 Interaction of propellers with gondola

The shape of the gondola of the lower gear box has an essential influence on the hydrodynamic parameters of a twin propeller arrangement. This has been studied extensively by Schulze (2001). In dependency of the length and the gondola diameter a set of four real parameters ( $G_D$ ,  $w_D$ ,  $R_D$ ,  $w_R$ ) to describe the following formulas were introduced.

$$K_{T(\text{gondola})}(J) = G_D * K_{T(\text{open water})}(J * (1 - w_D))$$

$$K_{Q(\text{gondola})}(J) = R_D * G_D * K_{Q(\text{open water})}(J * (1 - w_D) * (1 - w_R))$$

Based on experiments with systematically modified gondola diameters and lengths the parameters ( $G_D$ ,  $w_D$ ,  $R_D$ ,  $w_R$ ) were derived in such a way that the minimum of the following functional  $f$  was determined for this set of measurements:

$$f(G_D, w_D, R_D, w_R) = \int (K_{T(\text{gondola})}(J) - G_D * K_{T(\text{open water})}(J * (1 - w_D)))^2 + (K_{Q(\text{gondola})}(J) - R_D * G_D * K_{Q(\text{open water})}(J * (1 - w_D) * (1 - w_R)))^2 dJ$$

where the integral was to be determined over the interval ( $J_{\min}$ ,  $J_{\max}$ ). The minimum problem has a unique solution. The dependencies of the gondola geometry on these parameters is summarised in figures 6 and 7.

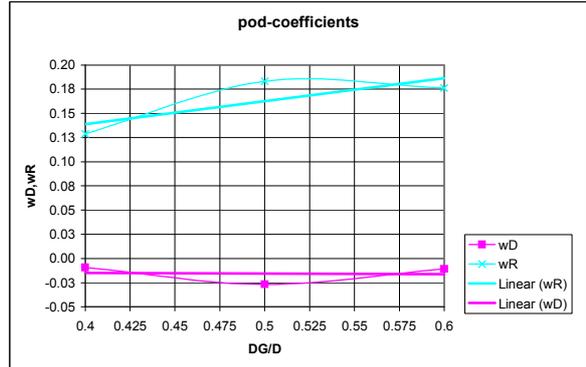
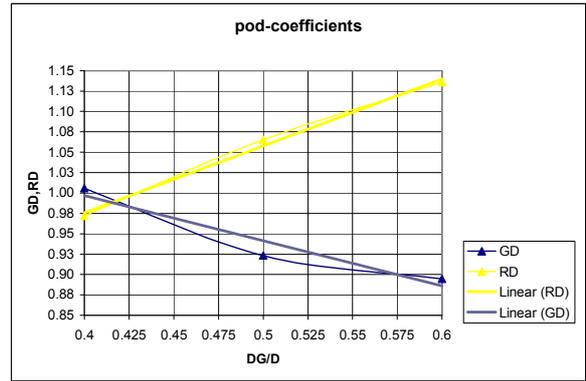


Fig. 6. Gondola-coefficients in dependency on the diameter ratio (Gondola diameter  $D_G$ , propeller diameter  $D$ )

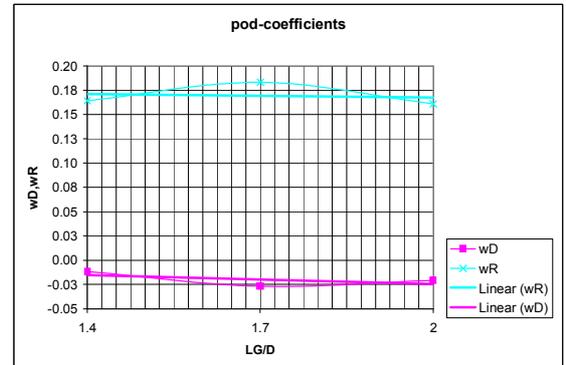
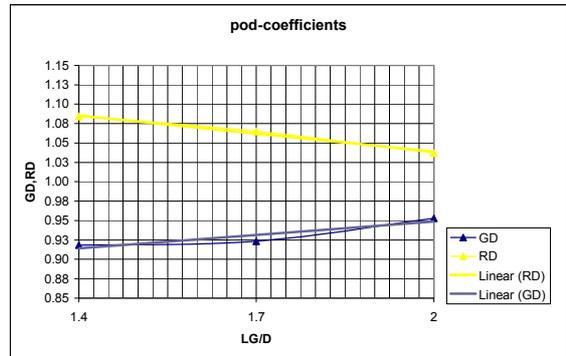


Fig. 7. Gondola-coefficients in dependency on the length ratio (Gondola length  $L_G$ , propeller diameter  $D$ )

### 3.0 FINAL HYDRODYNAMIC DESIGN OF FORTJES® Z-DRIVE

All hydrodynamic active parts of the FORTJES® were optimized by REINTJES in cooperation with the Potsdam model basin. The basic configuration of a CR propeller arrangement with propellers at a lower gear box was tested in the Hamburg model basin, with a pre design for strut, gondola and an initial design for propellers.

#### 3.1 Propeller arrangement at gear box (push-push, pull-pull or push-pull)

In a first step different possibilities for the arrangement of propellers were tested in the model basins. The open water tests were carried out in the towing tank of the SVA Potsdam (280 x 9 x 4.5 m). The differences in efficiencies between the three types of arrangements (push-push, pull-pull and push-pull) are not so significant. The push-pull arrangement was preferred, because in this case the CR propellers at the gondola (gear box) works without hollow shaft.

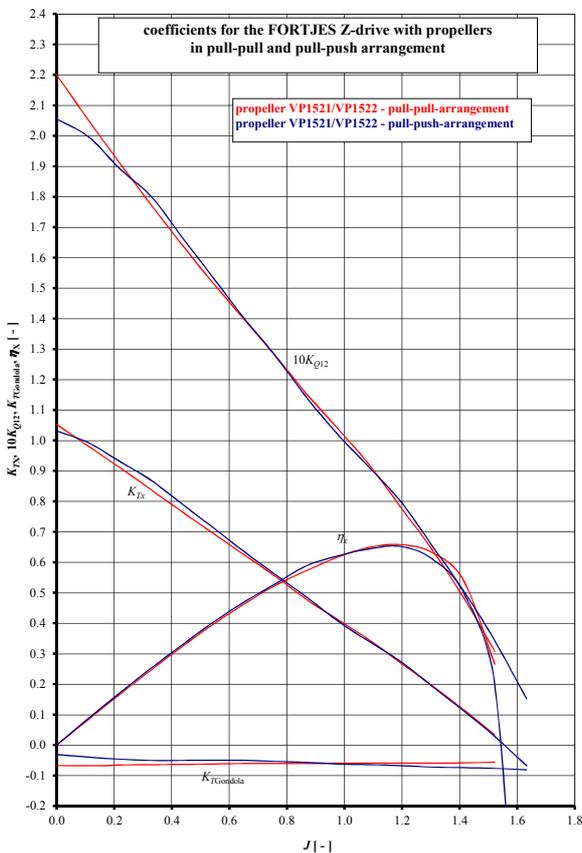


Fig. 8. Comparison of open water characteristics for the pull-pull and push-pull arrangement

#### 3.2 Optimisation of the lower gear box (gondola) design

Referring to the results from chapter 2.2 the shape of the lower gear box (gondola) has a strong influence on the hydrodynamic characteristics of the CR propeller system. The lower gear box is in general a cylindrical and

symmetrical body. Hence an optimization of the gondola it is possible to use profile theoretical tools based on potential flow calculations and 2D CFD methods. For the calculation of gondola resistance the SVA Potsdam has used the open source code XFOIL 6.96 and the 2D Navier Stokes Solver Navier2D from D. Engwirda (2007) (open source code for MATLAB). The shape of the gondola must fulfil two essentially requirements: At first it must be a housing for the “mechanical gear” that means it must be a good container for shaft, bearings and tooth wheels (etc.) and on the other hand the gondola must have good hydrodynamic properties, i.e. it must have especially a low resistance. Under these restrictions an optimal value was found for a NACA like family of profiles for a back position of maximal thickness of 55% and 0.25 thickness ratio for a Reynolds-number of 1E7 with the code XFOIL 6.9.

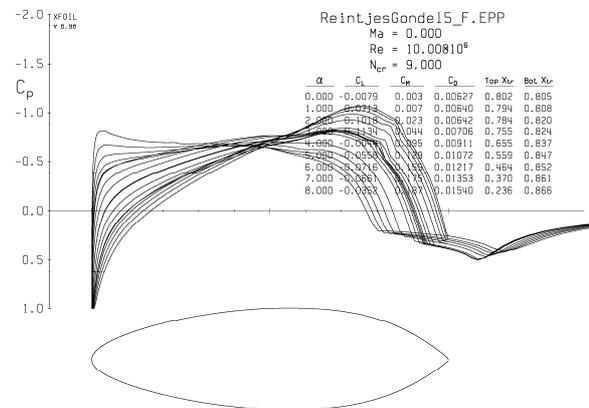


Fig. 9. Optimised NACA like – Profile with 55 % back position of maximal thickness and 0.251 thickness ratio ( $C_D$  with respect to chord length)

Then in addition, studies were carried out to simplify the hub geometry for the second propeller using CFD methods (Fig. 10).

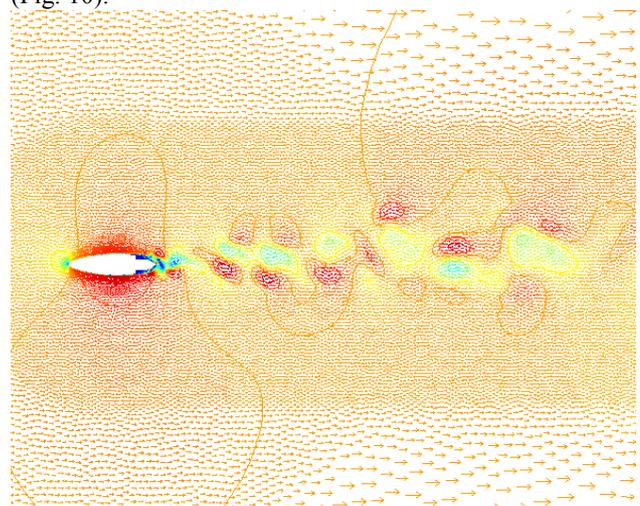


Fig. 10. Calculation of flow around the gondola with cylindrical hub for the second propeller (Reynolds-number 1E7)

The drag coefficients (with respect to the cross section area) were calculated to be  $C_{D1} = 0.0284$  for a faired hub contour and  $C_{D2} = 0.0241$  for the hub contour like fig.8. These values can be compared with the resistance coefficients of a penguin ( $C_{D,Penguin} = 0.03$ ). Later measurements with rotating rear propeller, showed however lower resistance coefficients (overall efficiency) for the faired hub, i.e. the gondola and hubs (for the front and the rear propeller) have a profile as shown in fig. 7.

### 3.3 Optimisation of the strut

The significant advantage of a counter-rotating propeller assembly with respect to efficiency is the swirl compensation of both propellers. With an additional body between the two propellers this swirl compensation is disturbed. Consequently, for a high efficiency of the whole system the swirl of the front propeller must reach the rear propeller undisturbed. By means of potential theory method the swirl of the front propeller which interacts with the strut was determined (see figure 11). After the selection of suitable profile contours for the strut geometry (also in dependence of the mechanical requirements) the angle of attack for each vertical profile cut of the twisted strut was determined in such a way, that the swirl is not reduced.

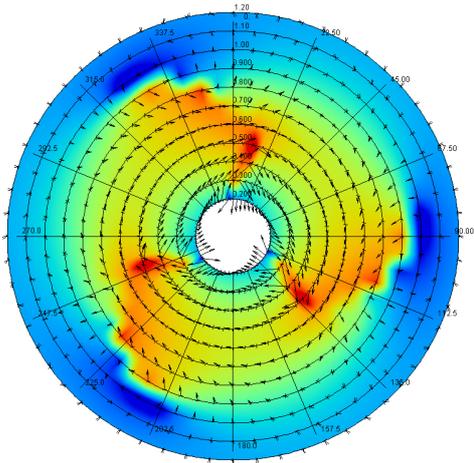


Fig. 11. Calculated flow of the front propeller with swirl (clockwise rotation)

As a result, an asymmetrical twisted strut is obtained and represented in figure 12.

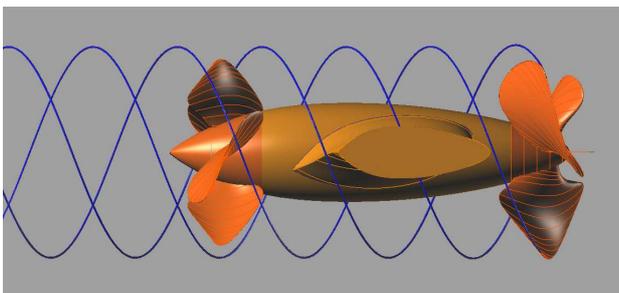


Fig. 12. Asymmetrical strut of FORTJES® with a suggested tip vortex

To check the correctness of the procedure for the strut design LDV measurements were finally carried out in the disk area of the rear propeller (figure 13). The results showed that the swirl of the front propeller was not reduced.

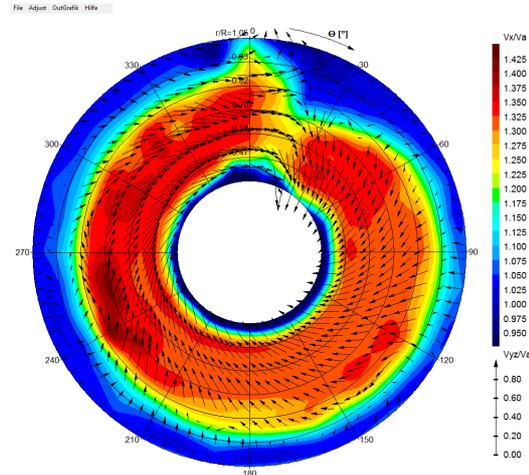


Fig. 13. LDV Measured flow in the plane of the rear propeller.

### 3.3 Optimisation of propellers

For the optimization of the front and rear propeller four programs (HSPopt, VORTEX, VTXopt and UNCA) were used. The program VORTEX calculates the quasi stationary characteristics of propellers using the lifting surface method (Schulze, 1995). In cooperation with postprocessors for a graphical representation VORTEX computes the open water characteristic, the pressure distribution, the cavitation behaviour, the forces and moments and the velocity field around the propeller. If an instationary inflow is defined, then VORTEX computes in cooperation with the postprocessor CAVIPLLOT the quasi stationary cavitation behaviour in the wake field and in cooperation with the postprocessor VTXFORCE the forces and moments acting at the blades and the propeller (body forces). The algorithms in the vortex lattice method generally leads to programs with a short computing time and sufficient accuracy. In contrast to other software VORTEX uses four parameters for a friction correction. All parameters for the friction correction are estimated by an ensemble of measurements with model propellers and have a functional representation with respect to the propeller main characteristics. This ensures a well behaved accuracy for propellers with a unconventional geometry too. The program UNCA (Szantyr, 1993) calculates the unsteady characteristics of propellers using the lifting surface method. UNCA includes a cavitation model and a tool for the estimation of tip vortex inception. The SVA has performed program interfaces between VORTEX and UNCA. The program VTXopt is based on the core of VORTEX and includes a full optimization algorithm for propeller design.

With the code HSPopt (H.-J. Heinke, R. Schulze, M. Steinwand, 2009) the pre-selection of the 3 bladed front propeller for high speed applications was carried out. After the pre-selection, the front propeller was further optimized using VTXopt to obtain the best cavitation properties and highest efficiencies.

With the methods from Section 3, the interactions of the front propeller with the gondola and strut were taken into account. After the calculation of the velocity distribution of the front propeller (figure 11) with VORTEX, the four bladed rear propeller was optimized under consideration of the inflow from the front propeller using VTXopt.

The combination of a 3-bladed front and a 4-bladed rear propeller ensure good noise and vibration characteristics.

#### 4.0 CONCLUSIONS

For a yacht application the FORTJES®-drive was intensively tested in the model basin SVA-Potsdam for propulsion, cavitation and manoeuvring properties in comparison to a usual twin-screw arrangement. After the tests the following advantages can be summarized as follows:

- The realization of FORTJES® as a Z-drive with two propellers makes an easy installation possible and allows to avoid the use of inclined shafts.
- The recovering of swirl losses by the contra rotating arrangement gives a higher efficiency as a usual twin screw concept.
- The push pull concept in combination with an asymmetric strut saves the advantages of the usual contra rotating propellers.
- The distribution of the input power to a three bladed front and a four bladed rear propeller gives excellent cavitation, noise and vibration properties for high speed applications.

Future research projects are planned for improving the interaction estimations based on the methods described in chapter 2.2 for gondola geometries with asymmetric struts and the definition and optimisation of contra rotating propeller series for a manifold of high speed applications as well as the derivation of polynomial coefficients for a quick pre-selection of the propellers.

#### REFERENCES

Breslin, J. P., Andersen, P. (1994), "Hydrodynamics of ship propellers" Cambridge Ocean Technology Series 3, Cambridge University Press 1994

Drela, M. MIT Aero & Astro, Harold Youngren, Aircraft, Inc., (2001), "XFOIL 6.9", 30 Nov 2001, (<http://web.mit.edu/drela/Public/web/xfoil/>)

Engwirda, D. (2007), „Navier2D, Mesh2D“, MatLab – Routinen, [d\\_engwirda@hotmail.com](mailto:d_engwirda@hotmail.com)

Heinke, H.-J. (1999) "Gegenlaufpropeller Ergebnisse von Serienversuchen und Messungen am Modell und Prototyp" Bericht Nr. 2536, Schiffbau-Versuchsanstalt Potsdam GmbH, (unpublished)

H.-J. Heinke, R. Schulze, M. Steinwand (2009), „SVA High-Speed Propeller Series“, 10<sup>th</sup> International Conference on Fast Sea Transportation FAST 2009, Athens, Greece, October 2009

Kuiper, G. (1992), "The Wageningen Propeller Series", MARIN Publication 92-001

Newton, R. N.; Rader, H. P. (1961). "Performance Data of Propellers for High Speed Craft", Transaction RINA, Vol. 103, London

Riegels, F. (1958), „Aerodynamische Profile“, R. Oldenburg, München 1958

Schulze, R. (1995), „Nachrechen- und Entwurfsverfahren für den Propellerentwurf“, SVA-Forum, SVA Potsdam GmbH

Schulze, R. (2001) „Propulsionssysteme mit gegenläufigen Propellern am Gondola“, Bundesminister für Wirtschaft Schlussbericht für das Forschungsvorhaben Reg.-Nr.: 355/99, Schiffbau-Versuchsanstalt Potsdam GmbH

Schulze, R. (2007), „Twisted Rudder – Extreme Design“, 14. SVA-Forum, Ruder in Theorie und Praxis, Schiffbau-Versuchsanstalt Potsdam, 7. November 2007

Schulze, R. (2009), „Entwurf und Optimierung eines Z-Drive Twin-Gondolas für REINTJES“, Bericht Nr. 3533, Schiffbau Versuchsanstalt Potsdam GmbH, (unpublished)

Schulze, R., Weber, A., "Application of the new FORTJES® Z-drive from REINTJES on planing vessels", 11<sup>th</sup> International Conference on Fast Sea Transportation FAST 2011, Honolulu, Hawaii, September 2011

Szantyr, J. (1993) "UNCA93 the lifting surface program for hydrodynamic analysis of marine propellers", Report No. RH-93/R-064, Centrum Techniki Okretowej, Gdansk, 1993